RCT T-1000s MEGAPOWER TROLLEY

- Pure Sinewave for Sensitive Electronics
 Motorised Loads
- Microprocessor Control Optimizes Reliability
- Input Power Factor Correction
- Output Power Factor 1.0
- Comprehensive Display Allows Easy Monitoring & Access of UPS Status
- Built-in MPPT solar charger
- 2 x USB 5 V DC output and 2 x 12 V DC output
- Battery cut off switch for safety
- Pre-installed batteries

INVERTER BATTERY

12 V

100 AH / 12 V

Battery Voltage

In-built Battery Specification

RATED POWER:

1000 W

OUTPUT VOLTAGE:

220 VAC

OUTPUT FREQUENCY:

50 / 60 Hz

OUTPUT WAVEFORM:

Pure Sine Wave







INVERTER

SOLAR INPUT

MAXIMUM PHOTOVOLTAIC VOLTAGE (VDC): $\leq 25 \text{ V}$

CHARGE VOLTAGE (VDC): 10 V - 25 V

RATED CHARGE CURRENT (A): 30 A

MAXIMUM POWER (Wp): 360 Wp

VOLTAGE OVERCHARGE PROTECTION

(VDC): 14.2 V

VOLTAGE OVERCHARGE RECOVERY

(VDC): 14.0 V

VOLTAGE OF FLOATING CHARGE (VDC):

13.7 V

AC OUTPUT:

2 x SA 3 Pin Socket - 230 V 50 Hz, 1000 VA / 1000 W Max. (Combined)

USB OUTPUT:

2 x USB Type A Port - 5 VDC 2 A Max.

DC OUTPUT:

2 x 12 V DC Port 2 A Max.

BATTERY TYPE:

1 x 12 DC 100 AH Deep Cycle

VRLA Gel Battery

PRODUCT INFORMATION

1. AC Output

8. LCD Display

2. Smart Cooling Fan 9. Function Buttons

3. AC Input

10. On / Off Buttons

4. Solar PV Input

11. 5VDC Output


5. Battery Extension

12. 12VDC Output

6. Battery Switch

13. DC Output Switch

7. Led Indicator

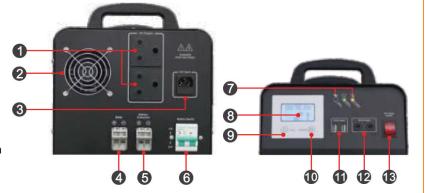

RUNTIME BASED ON 1X 12V DC 100Ah BATTERY











6 HOURS ESTIMATE





























3 HOURS ESTIMATE

















1.5 HOURS ESTIMATE

^{*}Derate to 80% of capacity in frequency converter mode and to 80% when the output voltage is adjusted to 200 / 208 / VAC. Product specifications are subject to change without further notice.